

Magnetic Contact Switches



SFD-3016

Spect Sheet


OVERHEAD/TRACK MOUNT

Specification:

- ◀ Designed for panel or sectional style overhead doors.
- ◀ Integrated multi position adjustable magnet bracket.
- ◀ Reversible probe assembly.
- ◀ Left or right installation.
- ◀ 22" armored cable, longer available.
- ◀ Hinge design for tighter clamping to track.
- ◀ Self-drilling screws included for easy installation.
- ◀ No special tools required for installation.



Dimension (mm):

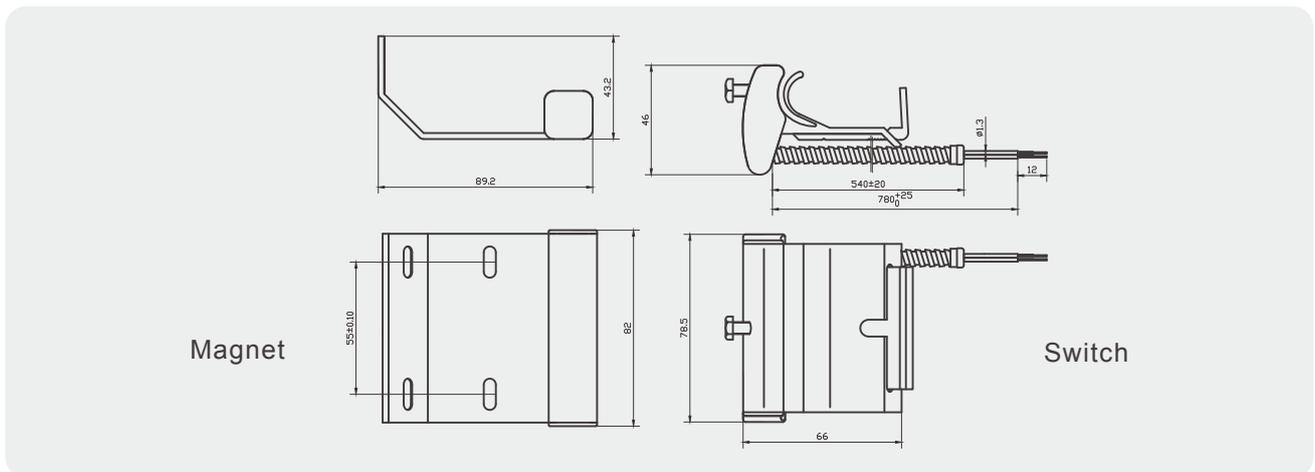

Order Information:

Part Number	Loop Type	Reed Form	Closed Gap Inch/mm	Departure Gap Inch/mm	Maximum Initial Contact Resistance (Ohms)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)	Certification
SFD-3016	Closed	N/O	2.5 (65)	2.5 (67)	0.20	10	100	0.5	

*These magnetic contact switches shall be installed so that a door or other movable opening cannot be opened more than 2 inches (51 mm) without initiating an alarm. switches exceeding 2 inches can not be installed per UL681-teh standard for installation and Classification of Burglar and Holdup Alarm.